



The Hallmark of Excellence

# The 2006 Tourer Range Sterling Caravans

Owner's Handbook



# CONTENTS

|                                            |    |
|--------------------------------------------|----|
| Warranty.....                              | 2  |
| What to do if you Require Assistance ..... | 4  |
| Annual Service/Inspection Record .....     | 5  |
| Specifications.....                        | 8  |
| Wiring Diagrams – Road Lights .....        | 13 |
| Wiring Diagrams – Internal Wiring .....    | 16 |
| Bulb Replacement .....                     | 19 |
| Change of Ownership                        |    |

## Warranty

All the illustrations and descriptive matter in this handbook are intended to give a general idea of the caravan. Changing market and supply situations and our policy of continuous product development may prevent us from maintaining the exact specifications detailed in this handbook. We therefore reserve the right to alter specifications as materials and conditions demand.

Dealers are not agents of Swift Group Limited, the manufacturer of Swift Group caravans and have absolutely no authority to bind the manufacturer by any express or implied undertaking or representation.

All caravans have a 3 year SuperSure manufacturer's warranty from the date of purchase (or hire purchase), which is subject to a chargeable annual service and inspection being carried out at an authorised Swift Group Service Centre.

During the warranty period, subject to the exclusions set out in this section of the handbook, the manufacturer, Swift Group Limited, will repair (or at its option, replace) all defective parts of the caravan.

The manufacturer will honour the warranty until 36 months from the date of sale, provided that the caravan has been serviced annually within 90 days before or 60 days after each anniversary of the

original date of sale. The third service must, however, be carried out before the expiry of the 36 month period from the original date of sale.

### **In the first 12 months the warranty will cover:**

Faults arising from a manufacturing defect but not those which are a result of normal wear and tear or those which relate to replacement light bulbs.

Also not covered under the first year are faults resulting from accidental damage or damage caused by misuse of any component part of the caravan.


### **In the years two and three the warranty will cover:**

1. All original components of the caravan including permanently fitted equipment forming part of the manufacturer's original specification.
2. Water ingress and body delamination.

### **Specific exclusions to Supersure Warranty during years two and three**

- Tyres including jockey wheel, glass including heat shields, sink lids, mirrors.
- Paintwork including all exterior paint, heat shields, heater cases and all other painted surfaces.

- Decals, mirror transfers, resin badges.
- GRP/ABS A frame covers, wheel spats and skirts.
- Cosmetic finishes to kitchen sinks, cooker tops, vanity units, shower trays.
- Soft furnishings including upholstery, curtains, pelmets.
- Carpets, lino and floor coverings including door mats, shower mats.
- Work surfaces, tables, and flaps.
- Wallboards, ceiling boards and all other interior décor finishes.
- Window catches, stays and associated fittings.
- Blinds and flyscreens including door, Heki and other rooflights.
- All hinges, catches, knobs, stays and handles (interior and exterior).
- Replacement of bulbs, fluorescent tubes, fuses and electrical connections including 12n and 12s plugs, high level brake lights and bulb contacts.
- Audio equipment including radios, speakers, aerials and associated parts.
- Bent jockey wheels, assemblies and corner steadies.



- Fair wear and tear, accidental damage or any damage caused by the misuse of any component fitted by the manufacturer.
- Routine maintenance items which are part of the annual service including brake shoes, one shot nuts, lubricants, AKS pads, rubber gas hose, the cleaning of the heater and fridge flues, the replacement of gas jets, the resealing and/or replacement of shower room sealant, and the adjustment and lubrication of locks.

#### **General terms applying to all three years of the warranty period**

The caravan is not covered for:-

- The failure of a component for reasons of fair wear and tear.
- Damage resulting from accidents.
- Misuse of any component.
- Normal deterioration or negligence of any person other than the Swift Group Limited which causes stoppage of or impairment to the function of any component of the caravan.
- Replacement of parts which have reached the end of their effective working life because of age and/or usage.
- Cleaning or adjustment of any assemblies.

The warranty will be invalidated if the caravan has been neglected, misused or, modified or for hire or reward. The caravan will be deemed to have been neglected if it has not been serviced and maintained as stated in this handbook.

The warranty only applies to caravans purchased and used within the UK, and for continuous journeys abroad of no longer than 90 days per journey.

The cost of transporting, towing or moving the caravan by any means to or from the place of repair is the responsibility of the owner.

The benefit of this warranty may be transferred to a new owner if the caravan is sold, provided that the caravan has been serviced by an authorised Swift Group Service Centre in accordance with the requirements of this handbook, and details of the change of ownership have been supplied to Swift Group using the change of ownership form set out in this handbook. Failure to notify Swift Group of a change of ownership within 14 days of such a change will invalidate the warranty.


You have legal rights under UK law governing the sale of consumer goods. This warranty does not affect your legal rights.

## Warranty

The name and address of the warranty provider is:-

Swift Group Limited  
Dunswell Road  
Cottingham  
East Yorkshire  
HU16 4JX

To make a claim under this warranty, contact the Swift Group Service Centre which supplied your caravan. Alternatively, details of your nearest authorised Swift Group Service Centre can be obtained by contacting the Swift Group Customer Care Department on 01482 875740 or enquiring on our web site: [www.swiftleisure.co.uk](http://www.swiftleisure.co.uk)



## Assistance

### WHAT TO DO IF YOU REQUIRE ASSISTANCE

Congratulations on purchasing a Sterling product. We are confident that you will enjoy many happy holidays. However, should you have an enquiry or require assistance with a problem, we hope that this guide will be of assistance to you.

**If you have a problem, or enquiry with regards to your new caravan, please follow these steps:**

1. Check the Owners Handbook, paying particular attention to the fault finding advice at the back of the book.
2. Contact your supplying dealer for assistance.

**If you need to contact the Swift Group, please be aware of the following:**

1. When contacting Swift Supercare, please quote your name, postcode and serial number of your caravan, or build number of your motorhome.
2. In most instances, the Customer Care Team will involve your dealer in resolving the issue you are experiencing.
3. If you are contacting the company by email, letter or fax, the Customer Care Team will respond to you within five working days from the date of receiving the correspondence.
4. If you are calling the Customer Care Team, please avoid where possible, Mondays and lunch times.
5. Please be aware that the Swift Group cannot send parts direct from the factory. In all cases, without exception, your dealer must place the order for you.

## Service/Inspection

### TOURING CARAVANS - ANNUAL SERVICE/INSPECTION RECORD

In order to comply with the warranty, you must have your caravan inspected and serviced by an authorised Swift Group Service Centre at least once per year.


It is important that the Owner's Handbook is stamped on the appropriate page by the authorised Swift Group Service Centre. Failure to do this will invalidate the warranty and the transfer of the warranty on the change of ownership.

The inspection should take approximately two to four hours and will cover the areas dealt with in the annual service check list. Any areas requiring service and/or maintenance will be highlighted by your dealer and we recommend that you authorise any necessary work to be carried out.

**NB.** It is essential, to validate the warranty, that an annual inspection be carried out by an authorised Swift Group Service Centre covering the items listed.

- |                                                 |                                                 |
|-------------------------------------------------|-------------------------------------------------|
| 1. Damp and lamination test.                    | 16. Water heater - gas and 230V AC (if fitted). |
| 2. Coupling head and breakaway cable.           | 17. Hob, grill and oven (if fitted).            |
| 3. Jockey wheel.                                | 18. Refrigerator 230V AC, 12V DC and gas.       |
| 4. Chassis and chassis to body security.        | 19. Gas system.                                 |
| 5. Corner steadies.                             | 20. Water pump, taps and water system.          |
| 6. Folding step (if fitted).                    | 21. Mains 230V AC system.                       |
| 7. Tyres and tyre pressures.                    | 22. Windows and fittings.                       |
| 8. Torque wheel nuts.                           | 23. Smoke alarm and battery.                    |
| 9. Brake rods and linkages.                     | 24. Roof lights.                                |
| 10. Hub bearings, brakes and brake shoes.       | 25. Furniture hinges/stays etc.                 |
| 11. Handbrake operation and performance.        | 26. Exterior locks and hinges.                  |
| 12. Suspension and shock absorbers (if fitted). | 27. Grab handle security.                       |
| 13. 12N and 12S 7-pin plugs and cables.         | 28. All internal vents.                         |
| 14. Road lights, wiring and reflectors.         | 29. Oil seals.                                  |
| 15. Internal lights and 12V DC system.          | 30. Blinds and fly screens (if fitted).         |







## Specifications

| EUROPA                                              | 390                         | 460                         | 470                        | 490                        | 500                         |
|-----------------------------------------------------|-----------------------------|-----------------------------|----------------------------|----------------------------|-----------------------------|
| Berths                                              | 2                           | 2                           | 4                          | 4                          | 5                           |
| Axles                                               | 1                           | 1                           | 1                          | 1                          | 1                           |
| Internal Length (bed box height)                    | 4.20m/13'9"                 | 4.67m/15'4"                 | 4.74m/15'7"                | 5.39m/17'8"                | 5.13m/16'10"                |
| Overall Width                                       | 2.23m/7'4"                  | 2.23m/7'4"                  | 2.23m/7'4"                 | 2.23m/7'4"                 | 2.23m/7'4"                  |
| Overall Height (inc. TV Aerial)                     | 2.70m/8'10"                 | 2.70m/8'10"                 | 2.70m/8'10"                | 2.70m/8'10"                | 2.70m/8'10"                 |
| Overall Length                                      | 5.88m/19'3"                 | 6.35m/20'10"                | 6.42m/21'1"                | 7.07m/23'2"                | 6.81m/22'4"                 |
| Mass in Running Order (inc. tolerance)              | 1017kg/20.0cwt              | 1074kg/21.1cwt              | 1090kg/21.5cwt             | 1199kg/23.6cwt             | 1185kg/23.3cwt              |
| Essential Habitation Equipment Payload              | 68kg/1.3cwt                 | 68kg/1.3cwt                 | 68kg/1.3cwt                | 68kg/1.3cwt                | 68kg/1.3cwt                 |
| Personal Effects Payload                            | 100kg/2.0cwt                | 105kg/2.1cwt                | 125kg/2.5cwt               | 132kg/2.6cwt               | 139kg/2.7cwt                |
| Optional Equipment Payload                          | 4kg/0.1cwt                  | 4kg/0.1cwt                  | 4kg/0.1cwt                 | 4kg/0.1cwt                 | 4kg/0.1cwt                  |
| Total user Payload                                  | 172kg/3.4cwt                | 177kg/3.5cwt                | 197kg/3.9cwt               | 204kg/4.0cwt               | 211kg/4.1cwt                |
| Maximum Technical Permissible Laden Mass (DECLARED) | 1189kg/23.4cwt              | 1251kg/24.6cwt              | 1287kg/25.4cwt             | 1403kg/27.6cwt             | 1396kg/27.4cwt              |
| Maximum Technical Permissible Laden Mass (POSSIBLE) | 1350kg/26.6cwt              | 1350kg/26.6cwt              | 1350kg/26.6cwt             | 1500kg/29.5cwt             | 1500kg/29.5cwt              |
| Awning A/A dimension†                               | 8.41m/27'7"                 | 8.88m/29'2"                 | 8.95m/29'4"                | 9.60m/31'6"                | 9.34m/30'8"                 |
| Tyre Size                                           | 195/70 r14 **               | 195/70 r14 **               | 195/70 r14**               | 175 r14 99                 | 175 r14 99                  |
| Tyre pressure at DECLARED MTPLM                     | **                          | **                          | **                         | 62psi                      | 58psi                       |
| Tyre pressure at POSSIBLE MTPLM                     | **                          | **                          | **                         | 65psi                      | 65psi                       |
| Static Load on Coupling Head                        | 100kg                       | 100kg                       | 100kg                      | 100kg                      | 100kg                       |
| Thermal Insulation Grade                            | TWO                         | TWO                         | TWO                        | TWO                        | TWO                         |
| <b>Bed Sizes</b>                                    |                             |                             |                            |                            |                             |
| Front Double                                        | 208cm x 180cm/6'10" x 5'11" | 208cm x 180cm/6'10" x 5'11" | 208cm x 134cm/6'10" x 4'5" | 208cm x 167cm/6'10" x 5'6" | 208cm x 180cm/6'10" x 5'11" |
| or One Single                                       | 190cm x 72cm/6'3" x 2'4"    | 180cm x 72cm/5'11" x 2'4"   |                            | 190cm x 72cm/6'3" x 2'4"   | 190cm x 72cm/6'3" x 2'4"    |
| and One Single                                      | 180cm x 72cm/5'11" x 2'4"   | 190cm x 72cm/6'3" x 2'4"    |                            | 167cm x 72cm/5'6" x 2'4"   | 180cm x 72cm/5'11" x 2'4"   |
| Rear Double                                         |                             |                             | 188cm x 138cm/6'2" x 4'6"  | 198cm x 138cm/6'6" x 4'6"  | 209cm x 133cm/6'10" x 4'4"  |
| Rear Bunk                                           |                             |                             |                            |                            | 194cm x 56cm/6'4" x 1'10"   |
| Side Single (offside)                               |                             |                             |                            |                            |                             |
| Side Single (nearside)                              |                             |                             |                            |                            |                             |
| Side Bunk                                           |                             |                             |                            |                            |                             |
| Rear Lower Bunk                                     |                             |                             |                            |                            |                             |
| Rear Upper Bunk                                     |                             |                             |                            |                            |                             |
| Side Fixed Lower Bunk                               |                             |                             |                            |                            |                             |
| Side Fixed Upper Bunk                               |                             |                             |                            |                            |                             |

**\*\*Alternative tyres:** Caravans fitted with **195/70 r14 95** have tyre pressure of **42psi**, caravans fitted with **195/70 r14 96** have a tyre pressure of **50psi**. Check the loading on the sidewall of the tyre before adjusting tyre pressure, replacing or purchasing a spare wheel and tyre. All tyres on the caravan must be of an identical size and load.

**Bed sizes:** Please note that double bed sizes are quoted with wrap round seating.

## Specifications

| EUROPA                                              | 520                         | 525                        | 540                         | 600                         |
|-----------------------------------------------------|-----------------------------|----------------------------|-----------------------------|-----------------------------|
| Berths                                              | 4                           | 4                          | 6                           | 6                           |
| Axles                                               | 1                           | 1                          | 1                           | 2                           |
| Internal Length (bed box height)                    | 5.23m/17'2"                 | 5.23m/17'2"                | 5.50m/18'1"                 | 6.27m/20'7"                 |
| Overall Width                                       | 2.23m/7'4"                  | 2.23m/7'4"                 | 2.23m/7'4"                  | 2.23m/7'4"                  |
| Overall Height (inc. TV Aerial)                     | 2.70m/8'10"                 | 2.70m/8'10"                | 2.70m/8'10"                 | 2.70m/8'10"                 |
| Overall Length                                      | 6.91m/22'8"                 | 6.91m/22'8"                | 7.18m/23'7"                 | 7.95m/26'1"                 |
| Mass in Running Order (inc. tolerance)              | 1183kg/23.3cwt              | 1163kg/22.9cwt             | 1216kg/23.9cwt              | 1363kg/26.8cwt              |
| Essential Habitation Equipment Payload              | 68kg/1.3cwt                 | 68kg/1.3cwt                | 68kg/1.3cwt                 | 68kg/1.3cwt                 |
| Personal Effects Payload                            | 130kg/2.6cwt                | 130kg/2.6cwt               | 153kg/3.0cwt                | 160kg/3.1cwt                |
| Optional Equipment Payload                          | 4kg/0.1cwt                  | 4kg/0.1cwt                 | 4kg/0.1cwt                  | 4kg/0.1cwt                  |
| Total user Payload                                  | 202kg/4.0cwt                | 202kg/4.0cwt               | 225kg/4.4cwt                | 232kg/4.5cwt                |
| Maximum Technical Permissible Laden Mass (DECLARED) | 1385kg/27.3cwt              | 1365kg/26.9cwt             | 1441kg/28.3cwt              | 1595kg/31.3cwt              |
| Maximum Technical Permissible Laden Mass (POSSIBLE) | 1500kg/29.5cwt              | 1500kg/29.5cwt             | 1500kg/29.5cwt              | 1800kg/35.4cwt              |
| Awning A/A dimension†                               | 9.44m/31'0"                 | 9.44m/31'0"                | 9.71m/31'10"                | 10.48m/34'5"                |
| Tyre Size                                           | 175 r14 99                  | 175 r14 99                 | 175 r14 99                  | 175/65 r14 82               |
| Tyre pressure at DECLARED MTPLM                     | 58psi                       | 58psi                      | 62psi                       | 44psi                       |
| Tyre pressure at POSSIBLE MTPLM                     | 65psi                       | 65psi                      | 65psi                       | 44psi                       |
| Static Load on Coupling Head                        | 100kg                       | 100kg                      | 100kg                       | 100kg                       |
| Thermal Insulation Grade                            | TWO                         | TWO                        | TWO                         | TWO                         |
| <b>Bed Sizes</b>                                    |                             |                            |                             |                             |
| Front Double                                        | 208cm x 180cm/6'10" x 5'11" | 209cm x 139cm/6'10" x 4'7" | 208cm x 180cm/6'10" x 5'11" | 208cm x 180cm/6'10" x 5'11" |
| or One Single                                       | 190cm x 72cm/6'3" x 2'4"    | 190cm x 72cm/6'3" x 2'4"   | 180cm x 72cm/5'11" x 2'4"   | 180cm x 72cm/5'11" x 2'4"   |
| and One Single                                      | 180cm x 72cm/5'11" x 2'4"   | 190cm x 72cm/6'3" x 2'4"   | 180cm x 72cm/5'11" x 2'4"   | 190cm x 72cm/6'3" x 2'4"    |
| Rear Double                                         |                             |                            |                             |                             |
| Rear Bunk                                           |                             |                            |                             |                             |
| Side Single (offside)                               | 180cm x 70cm/5'11" x 2'4"   | 180cm x 70cm/5'11" x 2'4"  |                             |                             |
| Side Single (nearside)                              |                             |                            | 180cm x 70cm/5'11" x 2'4"   | 180cm x 70cm/5'11" x 2'4"   |
| Side Bunk                                           | 178cm x 59cm/5'10" x 1'11"  | 178cm x 59cm/5'10" x 1'11" | 178cm x 59cm/5'10" x 1'11"  | 178cm x 59cm/5'10" x 1'11"  |
| Rear Lower Bunk                                     |                             |                            | 180cm x 62cm/5'11" x 2'1"   |                             |
| Rear Upper Bunk                                     |                             |                            | 184cm x 60cm/6'0" x 2'0"    |                             |
| Side Fixed Lower Bunk                               |                             |                            |                             | 180cm x 56cm/5'11" x 1'10"  |
| Side Fixed Upper Bunk                               |                             |                            |                             | 180cm x 58cm/5'11" x 1'11"  |

**Bed sizes:** Please note that double bed sizes are quoted with wrap round seating.

†**Note on awning sizes:** Due to the varying awning designs and sizes the awning sizes given are approximate only. Specific awning sizes must be confirmed by your dealer or the awning manufacturer prior to purchase.

## Specifications

| ECCLES                                              | Diamond                    | Topaz                      | Emerald                    | Moonstone                   |
|-----------------------------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|
| Berths                                              | 2                          | 2                          | 4                          | 4                           |
| Axles                                               | 1                          | 1                          | 1                          | 1                           |
| Internal Length (bed box height)                    | 4.61m/15'2"                | 4.61m/15'2"                | 5.23m/17'2"                | 5.23m/17'2"                 |
| Overall Width                                       | 2.23m/7'4"                 | 2.23m/7'4"                 | 2.23m/7'4"                 | 2.23m/7'4"                  |
| Overall Height (inc. TV Aerial)                     | 2.76m/9'1"                 | 2.76m/9'1"                 | 2.76m/9'1"                 | 2.76m/9'1"                  |
| Overall Length                                      | 6.30m/20'8"                | 6.30m/20'8"                | 6.92m/22'8"                | 6.92m/22'8"                 |
| Mass in Running Order (inc. tolerance)              | 1116kg/22.0cwt             | 1122kg/22.1cwt             | 1202kg/23.7cwt             | 1233kg/24.3cwt              |
| Essential Habitation Equipment Payload              | 68kg/1.3cwt                | 68kg/1.3cwt                | 68kg/1.3cwt                | 63kg/1.3cwt                 |
| Personal Effects Payload                            | 104kg/2.0cwt               | 104kg/2.0cwt               | 130kg/2.6cwt               | 130kg/2.6cwt                |
| Optional Equipment Payload                          | 16kg/0.3cwt                | 3kg/0.1cwt                 | 3kg/0.1cwt                 | 3kg/0.1cwt                  |
| Total user Payload                                  | 188kg/3.6cwt               | 175kg/3.4cwt               | 201kg/4.0cwt               | 201kg/4.0cwt                |
| Maximum Technical Permissible Laden Mass (DECLARED) | 1304kg/25.6cwt             | 1297kg/25.5cwt             | 1403kg/27.7cwt             | 1434kg/28.3cwt              |
| Maximum Technical Permissible Laden Mass (POSSIBLE) | 1350kg/26.6cwt             | 1350kg/26.6cwt             | 1500kg/29.5cwt             | 1500kg/29.5cwt              |
| Awning A/A dimension†                               | 8.90m/29'2"                | 8.90m/29'2"                | 9.52m/31'3"                | 9.52m/31'3"                 |
| Tyre Size                                           | 195/70 r14 **              | 195/70 r14 **              | 175 r14 99                 | 175 r14 99                  |
| Tyre pressure at DECLARED MTPLM                     | **                         | **                         | 62psi                      | 62psi                       |
| Tyre pressure at POSSIBLE MTPLM                     | **                         | **                         | 65psi                      | 65psi                       |
| Static Load on Coupling Head                        | 100kg                      | 100kg                      | 100kg                      | 100kg                       |
| Thermal Insulation Grade                            | TWO                        | TWO                        | TWO                        | TWO                         |
| <b>Bed Sizes</b>                                    |                            |                            |                            |                             |
| Front Double                                        | 208cm x 190cm/6'10" x 6'3" | 208cm x 190cm/6'10" x 6'3" | 208cm x 139cm/6'10" x 4'7" | 208cm x 180cm/6'10" x 5'11" |
| or One Single                                       | 190cm x 71cm/6'3" x 2'4"   | 190cm x 71cm/6'3" x 2'4"   | 190cm x 71cm/6'3" x 2'4"   | 190cm x 71cm/6'3" x 2'4"    |
| and One Single                                      | 190cm x 71cm/6'3" x 2'4"   | 190cm x 71cm/6'3" x 2'4"   | 190cm x 71cm/6'3" x 2'4"   | 180cm x 71cm/5'11" x 2'4"   |
| Rear Double                                         |                            |                            |                            |                             |
| Rear Bunk                                           |                            |                            |                            |                             |
| Side Single (offside)                               |                            |                            | 180cm x 66cm/5'11" x 2'2"  | 180cm x 66cm/5'11" x 2'2"   |
| Side Bunk                                           |                            |                            | 178cm x 56cm/5'10" x 1'10" | 178cm x 56cm/5'10" x 1'10"  |

**\*\*Alternative tyres:** Caravans fitted with **195/70 r14 95** have tyre pressure of **42psi**, caravans fitted with **195/70 r14 96** have a tyre pressure of **50psi**. Check the loading on the sidewall of the tyre before adjusting tyre pressure, replacing or purchasing a spare wheel and tyre. All tyres on the caravan must be of an identical size and load.

**Bed sizes:** Please note that double bed sizes are quoted with wrap round seating.

## Specifications

| ECCLES                                              | Amethyst                   | Onyx                       | Opal                       | Sapphire                    |
|-----------------------------------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|
| Berths                                              | 5                          | 4                          | 4                          | 5                           |
| Axles                                               | 1                          | 1                          | 1                          | 1                           |
| Internal Length (bed box height)                    | 5.39m/17'8"                | 5.39m/17'8"                | 5.39m/17'8"                | 5.39m/17'8"                 |
| Overall Width                                       | 2.23m/7'4"                 | 2.23m/7'4"                 | 2.23m/7'4"                 | 2.23m/7'4"                  |
| Overall Height (inc. TV Aerial)                     | 2.76m/9'1"                 | 2.76m/9'1"                 | 2.76m/9'1"                 | 2.76m/9'1"                  |
| Overall Length                                      | 7.08m/23'3"                | 7.08m/23'3"                | 7.08m/23'3"                | 7.08m/23'3"                 |
| Mass in Running Order (inc. tolerance)              | 1254kg/24.7cwt             | 1250kg/24.6cwt             | 1239kg/24.4cwt             | 1262kg/24.8cwt              |
| Essential Habitation Equipment Payload              | 68kg/1.3cwt                | 68kg/1.3cwt                | 68kg/1.3cwt                | 68kg/1.3cwt                 |
| Personal Effects Payload                            | 142kg/2.8cwt               | 132kg/2.6cwt               | 132kg/2.6cwt               | 142kg/2.8cwt                |
| Optional Equipment Payload                          | 3kg/0.1cwt                 | 3kg/0.1cwt                 | 3kg/0.1cwt                 | 3kg/0.1cwt                  |
| Total user Payload                                  | 213kg/4.2cwt               | 203kg/4.0cwt               | 203kg/4.0cwt               | 213kg/4.2cwt                |
| Maximum Technical Permissible Laden Mass (DECLARED) | 1467kg/28.9cwt             | 1453kg/28.6cwt             | 1442kg/28.4cwt             | 1475kg/29.0cwt              |
| Maximum Technical Permissible Laden Mass (POSSIBLE) | 1500kg/29.5cwt             | 1500kg/29.5cwt             | 1500kg/29.5cwt             | 1500kg/29.5cwt              |
| Awning A/A dimension†                               | 9.68m/31'9"                | 9.68m/31'9"                | 9.68m/31'9"                | 9.68m/31'9"                 |
| Tyre Size                                           | 175 r14 99                 | 175 r14 99                 | 175 r14 99                 | 175 r14 99                  |
| Tyre pressure at DECLARED MTPLM                     | 62psi                      | 62psi                      | 62psi                      | 62psi                       |
| Tyre pressure at POSSIBLE MTPLM                     | 65psi                      | 65psi                      | 65psi                      | 65psi                       |
| Static Load on Coupling Head                        | 100kg                      | 100kg                      | 100kg                      | 100kg                       |
| Thermal Insulation Grade                            | TWO                        | TWO                        | TWO                        | TWO                         |
| <b>Bed Sizes</b>                                    |                            |                            |                            |                             |
| Front Double                                        | 208cm x 139cm/6'10" x 4'7" | 208cm x 166cm/6'10" x 5'5" | 208cm x 139cm/6'10" x 4'7" | 208cm x 180cm/6'10" x 5'11" |
| or One Single                                       |                            | 190cm x 71cm/6'3" x 2'4"   |                            | 190cm x 71cm/6'3" x 2'4"    |
| and One Single                                      |                            | 166cm x 71cm/5'5" x 2'4"   |                            | 180cm x 71cm/5'11" x 2'4"   |
| Rear Double                                         | 208cm x 138cm/6'10" x 4'6" | 196cm x 138cm/6'5" x 4'6"  | 190cm x 138cm/6'3" x 4'6"  | 192cm x 138cm/6'4" x 4'6"   |
| Rear Bunk                                           | 192cm x 58cm/6'4" x 1'11"  |                            |                            | 192cm x 58cm/6'4" x 1'11"   |
| Side Single (offside)                               |                            |                            |                            |                             |
| Side Bunk                                           |                            |                            |                            |                             |

**Bed sizes:** Please note that double bed sizes are quoted with wrap round seating.

†**Note on awning sizes:** Due to the varying awning designs and sizes the awning sizes given are approximate only. Specific awning sizes must be confirmed by your dealer or the awning manufacturer prior to purchase.


## Specifications

| ECCLES ELITE                                        | Wayfarer                    | Explorer                    | Searcher                   | Trekker                     |
|-----------------------------------------------------|-----------------------------|-----------------------------|----------------------------|-----------------------------|
| Berths                                              | 5                           | 4                           | 4                          | 5 opt 6                     |
| Axles                                               | 2                           | 2                           | 2                          | 2                           |
| Internal Length (bed box height)                    | 6.27m/20'7"                 | 6.27m/20'7"                 | 6.27m/20'7"                | 6.27m/20'7"                 |
| Overall Width                                       | 2.23m/7'4"                  | 2.23m/7'4"                  | 2.23m/7'4"                 | 2.23m/7'4"                  |
| Overall Height (inc. TV Aerial)                     | 2.76m/9'1"                  | 2.76m/9'1"                  | 2.76m/9'1"                 | 2.76m/9'1"                  |
| Overall Length                                      | 7.96m/26'1"                 | 7.96m/26'1"                 | 7.96m/26'1"                | 7.96m/26'1"                 |
| Mass in Running Order (inc. tolerance)              | 1449kg/28.5cwt              | 1428kg/28.1cwt              | 1487kg/29.3cwt             | 1476kg/29.1cwt              |
| Essential Habitation Equipment Payload              | 105kg/2.1cwt                | 105kg/2.1cwt                | 105kg/2.1cwt               | 105kg/2.1cwt                |
| Personal Effects Payload                            | 150kg/3.0cwt                | 140kg/2.8cwt                | 140kg/2.8cwt               | 160kg/3.1cwt                |
| Optional Equipment Payload                          | 33kg/0.6cwt                 | 33kg/0.6cwt                 | 33kg/0.6cwt                | 53kg/1.0cwt                 |
| Total user Payload                                  | 288kg/5.7cwt                | 278kg/5.5cwt                | 278kg/5.5cwt               | 318kg/6.2cwt                |
| Maximum Technical Permissible Laden Mass (DECLARED) | 1737kg/34.2cwt              | 1706kg/33.6cwt              | 1765kg/34.8cwt             | 1794kg/35.3cwt              |
| Maximum Technical Permissible Laden Mass (POSSIBLE) | 1800kg/35.4cwt              | 1800kg/35.4cwt              | 1800kg/35.4cwt             | 1800kg/35.4cwt              |
| Awning A/A dimension†                               | 10.50m/34'5"                | 10.50m/34'5"                | 10.50m/34'5"               | 10.50m/34'5"                |
| Tyre Size                                           | 175/65 r14 82               | 175/65 r14 82               | 175/65 r14 82              | 175/65 r14 82               |
| Tyre pressure at DECLARED MTPLM                     | 44psi                       | 44psi                       | 44psi                      | 44psi                       |
| Tyre pressure at POSSIBLE MTPLM                     | 44psi                       | 44psi                       | 44psi                      | 44psi                       |
| Static Load on Coupling Head                        | 100kg                       | 100kg                       | 100kg                      | 100kg                       |
| Thermal Insulation Grade                            | TWO                         | TWO                         | TWO                        | TWO                         |
| <b>Bed Sizes</b>                                    |                             |                             |                            |                             |
| Front Double                                        | 208cm x 180cm/6'10" x 5'11" | 208cm x 180cm/6'10" x 5'11" | 208cm x 139cm/6'10" x 4'7" | 208cm x 180cm/6'10" x 5'11" |
| or One Single                                       | 180cm x 71cm/5'11" x 2'4"   | 182cm x 71cm/6'0" x 2'4"    |                            | 190cm x 71cm/6'3" x 2'4"    |
| and One Single                                      | 190cm x 71cm/6'3" x 2'4"    | 180cm x 71cm/5'11" x 2'4"   |                            | 180cm x 71cm/5'11" x 2'4"   |
| Rear Double                                         | 208cm x 138cm/6'10" x 4'6"  | 186cm x 134cm/6'1" x 4'5"   | 192cm x 138cm/6'4" x 4'6"  |                             |
| Rear Bunk                                           | 192cm x 58cm/6'4" x 1'11"   |                             |                            |                             |
| Side Single (nearside)                              |                             |                             |                            | 180cm x 66cm/5'11" x 2'2"   |
| Side Fixed Lower Bunk                               |                             |                             |                            | 182cm x 66cm/6'0" x 2'2"    |
| Side Fixed Upper Bunk                               |                             |                             |                            | 184cm x 68cm/6'0" x 2'2"    |
| Optional Bunk                                       |                             |                             |                            | 172cm x 56cm/5'8" x 1'10"   |

**Bed sizes:** Please note that double bed sizes are quoted with wrap round seating.


## Wiring Diagrams

### EUROPA RANGE 2006 - ROAD LIGHTS

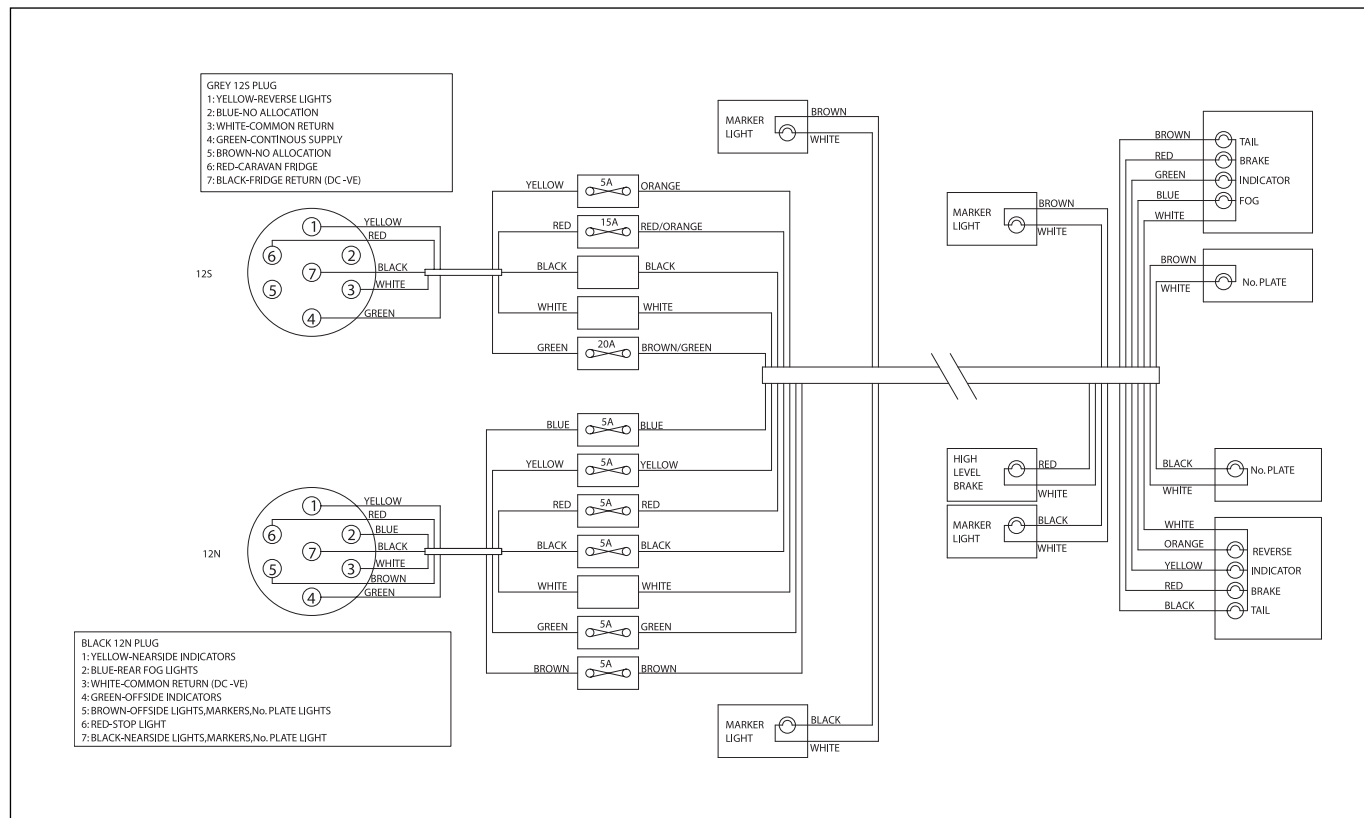


## Wiring Diagrams

### ECCLES RANGE 2006 - ROAD LIGHTS

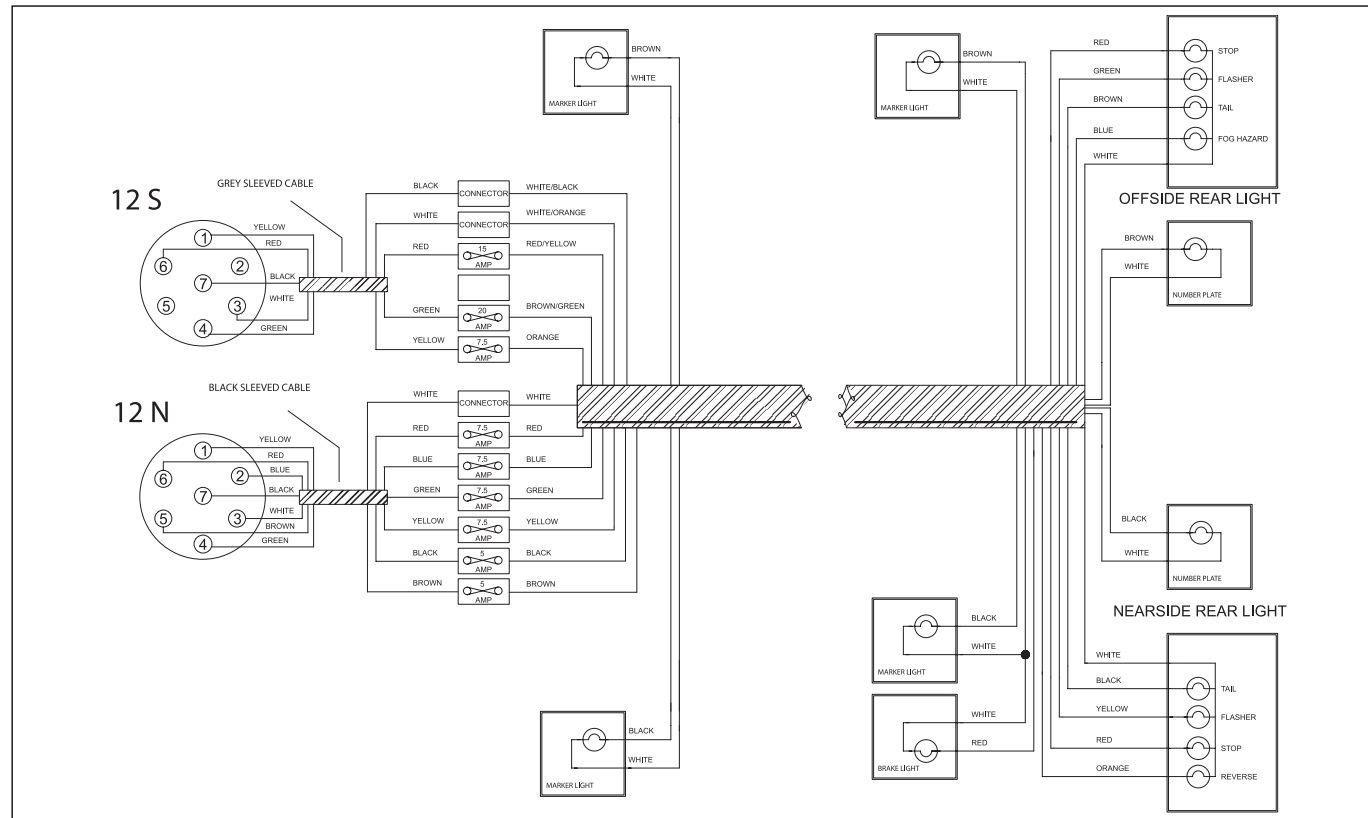

## Wiring Diagrams

### ECCLES ELITE RANGE 2006 - ROAD LIGHTS

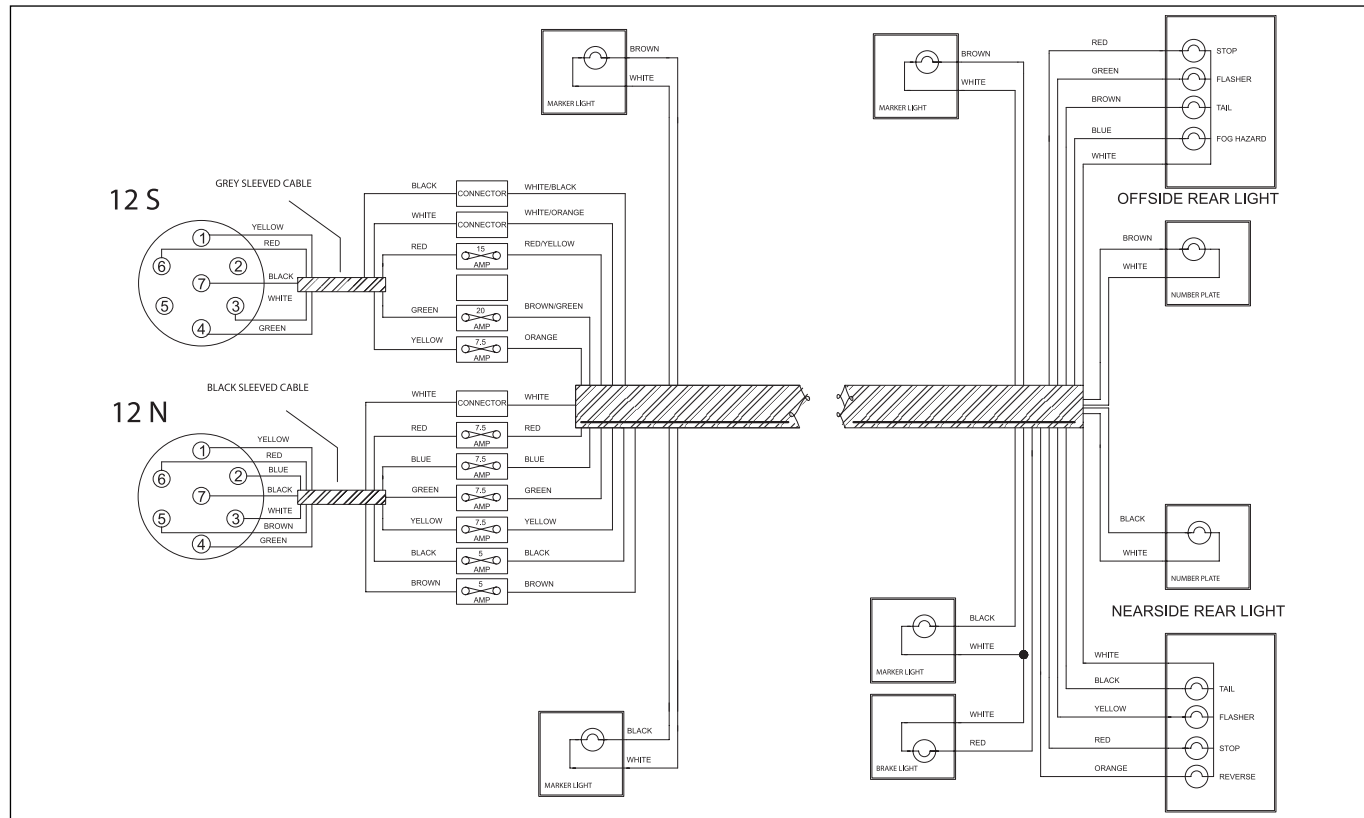




[illegible]

# Wiring Diagrams

## ECCLES RANGE 2005 - 12V AND 230V

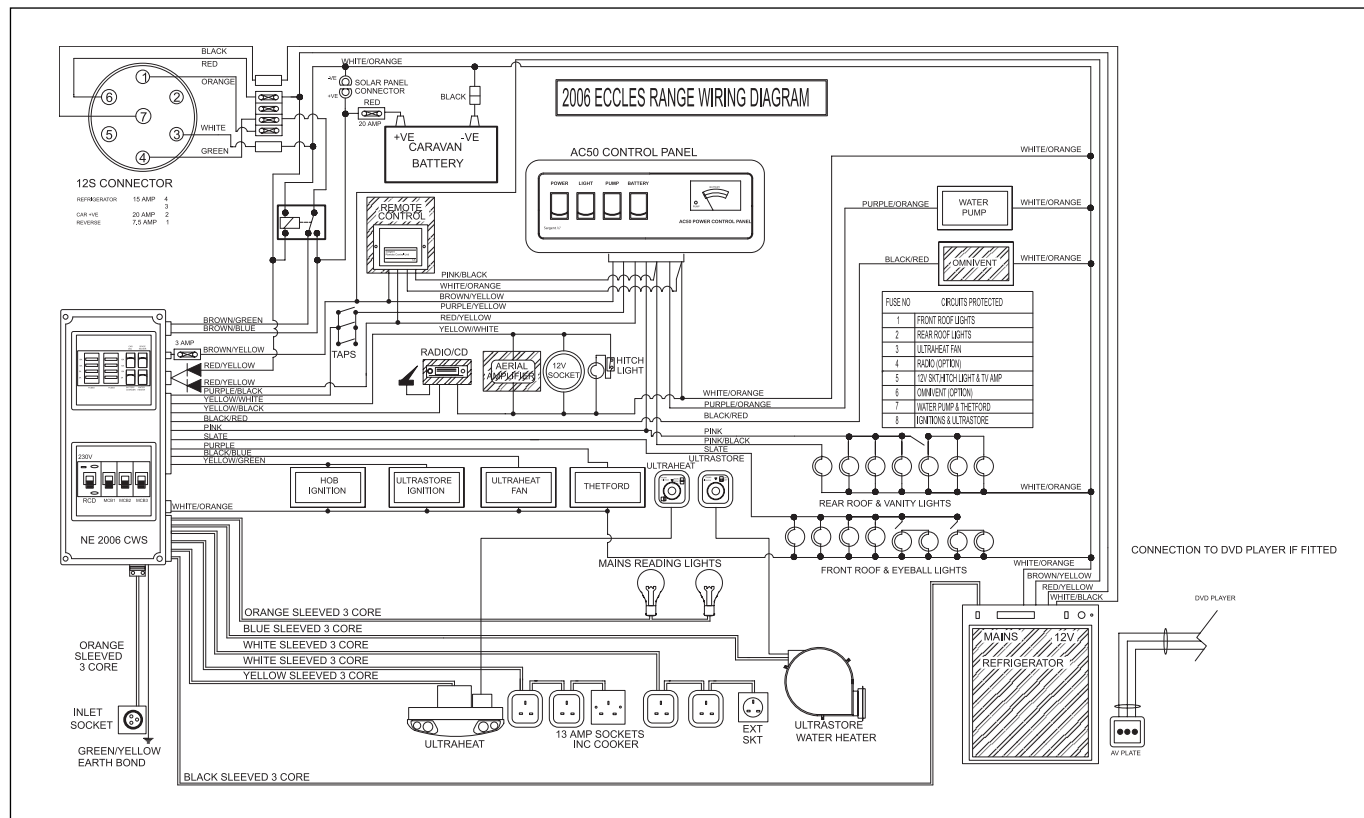



## Bulb Replacement

|                                 | TYPE                       | RATING       | EUROPA | ECCLES | ECCLES ELITE |
|---------------------------------|----------------------------|--------------|--------|--------|--------------|
| <b>ROAD LIGHTS</b>              |                            |              |        |        |              |
| Front marker lights             | W5W                        | 12v 3w       | ✓      | ✓      | ✓            |
| Side marker                     | C5W                        | 12v 5w       | ✓      | ✓      | ✓            |
| Reversing light                 | P21W                       | 12v 21w      | ✓      | ✓      | ✓            |
| Rear indicator light            | P21W                       | 12v 21w      | ✓      | ✓      | ✓            |
| Brake / tail light              | P21/5W                     | 12v 21w / 5w | ✓      | ✓      | ✓            |
| Fog light                       | P21                        | 12v 21w      | ✓      | ✓      | ✓            |
| Number plate light              | C5W                        | 12v 5w       | ✓      | ✓      | ✓            |
| High level brake light          | T5/13.5                    | 12v 2.3w     | ✓      | ✓      | ✓            |
| Hitch cover light               | C5W                        | 12v 5w       |        | ✓      | ✓            |
| <b>INTERIOR/OTHER</b>           |                            |              |        |        |              |
| Awning light                    | P21W                       | 12v 20w      | ✓      | ✓      | ✓            |
| Spot / reading lights           | Halogen capsule            | G4 12v 10w   |        | ✓      | ✓            |
| Spot / reading lights           | GU4/MR11 Dichroic          | GU4 12v 10w  | ✓      |        |              |
| Downlighters                    | Halogen capsule            | G4 12v 10w   |        | ✓      | ✓            |
| Round ceiling lights            | Halogen capsule            | G4 12v 20w   | ✓      | ✓      | ✓            |
| Small white round ceiling light | Halogen capsule            | G4 12v 10w   | ✓      | ✓      | ✓            |
| Oval ceiling light              | Halogen capsule            | G4 12v 10w   | ✓      |        |              |
| Mains lights                    | Small screw (candle shape) | 240v 40w     |        | ✓      | ✓            |

Note: Not all bulbs and lights feature on all models within a range

## Ownership

### NOTIFICATION OF CHANGE OF OWNERSHIP

If you sell your caravan, please notify the change of ownership by completing this page, detaching it and sending it to:  
Swift Group Ltd., Dunswell Road, Cottingham, East Yorkshire, HU16 4JX.

|                     |             |       |
|---------------------|-------------|-------|
| DETAILS OF CARAVAN: | Model:      | _____ |
|                     | Chassis No: | _____ |
| CURRENT OWNER:      | Name:       | _____ |
|                     | Address:    | _____ |
|                     |             | _____ |
| NEW OWNER:          | Name:       | _____ |
|                     | Address:    | _____ |
|                     |             | _____ |

Please note that the benefit of any unexpired warranty cannot be transferred to the new owner until the change of ownership details above have been received.

## NCC Approved

All Swift Group models have been certified by the National Caravan Council for compliance with stringent European Standards, British Legislation and industry set Codes of Practice specifically relating to health and safety issues. The approval process covers the testing and inspection of critical areas of the product from fire safety, weights and dimensions, to gas, electrics and ventilation. Every Sterling caravan carries the "NCC Approved Caravan" badge. The NCC also conduct unannounced inspections at the Swift factory to ensure continued compliance. NCC Approval gives you peace of mind that your caravan is legal and safe.





**The Hallmark of Excellence**

Sterling Caravans, Dunswell Road,  
Cottingham, East Yorkshire HU16 4JX.  
Telephone: 01482 875740  
Fax: 01482 840082  
e-mail: [enquiry@swiftleisure.co.uk](mailto:enquiry@swiftleisure.co.uk)  
web site: [www.sterlingcaravans.co.uk](http://www.sterlingcaravans.co.uk)

A Member of the Swift Group

Issued September 2005

1065320